

ECOLOGY

IP65 DISTRIBUTION BOXES

Description: IP65 SURFACE BOX 4x12 (48) MOD. IP65 (TW). ABS

Reference:

CDN48PT/RR

Characteristics:

Product type:	Polycarbonate watertight distribution boxes (Sealable)
Exterior dimensions (Height x Width x Depth):	872x310x148 mm
Dimensions of the flush-fit gap (HxWxD):	-
Number of modules:	4x12 (48) rail DIN
Installation:	Surface
Color:	RAL 7035
Window:	Transparent
Weight (kg):	5,5
Cable entry:	Top: 8xM20 - 2xM25 - 2xM32 - 1xM40 - 1xM40. Bottom: 6xM20 - 2xM25 - 2xM32 - 1xM40. Int.:8xM25. Oblong rear: 4xOB 25/32/25
Components:	-
Materials:	Halogen-free plastic materials. Frame and base: ABS. UV protection under ISO standard 4892-2, Method A: 500h
Lid-window-door material:	Tinted PC, UV protection

Technical data:

Degree of protection:	IP65
Resistance to impact:	IK08
Glow wire resistance:	650 °C
Ball pressure test:	70 °C
Ambient temperature range:	-25 °C / +40 °C
Maximum operating voltage:	1000 V AC / 1500 V DC
Rated current:	
Double insulation:	Class II

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208
Certificates:	



Codes:


EAN:	8431044528076
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000214

ECOLOGY

IP65 DISTRIBUTION BOXES

Description: IP65 SURFACE BOX 4x12 (48) MOD. IP65 (TW). ABS

Reference: CDN48PT/RR

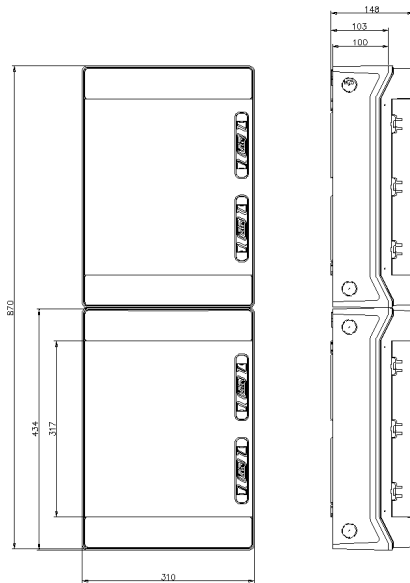

Exterior dimensions (Height x Width x Depth):

872x310x148 mm

Dimensions of the flush-fit gap (Height x Width x Depth):

-

Sustainability:

RoHS - REACH

Supply:

Supplied in individual cardboard packaging. When several items are sent together, they are bundled together with transparent film.

Packaging units: 1

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial and outdoor environments. Industrial sites, docks, swimming pools, garages, anywhere that requires a high degree of protection against dust, splashes and impacts.